

Product Catalogue

Food Safety Instruments

HACCP International Certified Temperature Monitoring Instruments for food safety.

- Probe thermometers
- Infrared thermometers
- pH testers
- Food probe wipes



Visit us online!

Now you can shop online* for all your food safety instruments



Scan to go directly to the site.

www.testo.nz

*FOR EXISTING EUROTEC ACCOUNT HOLDERS, PLEASE PHONE OR EMAIL US DIRECTLY TO PLACE YOUR ORDER.

Probe Thermometers



Testo 104

- Waterproof (IP67), robust thermometer with folding probe
- Includes batteries and factory calibration certificate

Eurotec Code: 0563.0104



Testo 106-T3 Set

- Thermometer Set
- Includes Topsafe® protective case, belt holder, batteries and factory calibration certificate

Eurotec Code: 0563.1063



Testo 103

- Economical Folding thermometer
- Includes batteries and factory calibration certificate

Eurotec Code: 0560.0103



Testo 105

- Robust thermometer designed for single hand operation
- Great for Butchery
- Includes batteries and factory calibration certificate

Eurotec Code: 0563.1051



Testo 108

- Thermometer (IP67)
- Supplied with standard immersion/penetration t/c probe type T
- Also accepts K type thermocouple (available separately)
- Soft protective case, probe stowage and batteries included
- Fast, easy and accurate temperature measurement

Eurotec Code: 0563.1080



Probe Thermometers



Testo 926

- Professional Insertion Thermometer Set
- Includes Topsafe® protective case, waterproof insertion probe, batteries and factory and calibration certificate.

Eurotec Code: 0563.9262



Testo 104-IR Combo

- Folding combo infra-red & probe thermometer
- Dual laser targeting
- Durable S/S & ABS design
- Waterproof (IP65)
- Ideal for deli/inwards goods

Eurotec Code: 0560.1040



Testo 826-T4 probe + I/R

- I/R and Insertion probe thermometer
- Includes Topsafe® protective case, belt holder, batteries and factory calibration certificate included.

Eurotec Code: 0563.8284



I/R Thermometers & Data Loggers



Testo 831

- Infra-Red Thermometer
- 2 point laser sighting
- 30:1 optics
- Includes: Belt holder, batteries and factory calibration certificate

Eurotec Code: 0560.8316



Testo 826-T2

- Infra-Red Thermometer
- Laser pointer and Alarm
- Includes: Topsafe® protective case, batteries and factory calibration certificate

Eurotec Code: 0563.8282



Testo 805

- Mini Infra-Red Thermometer
- Waterproof IP65
- Includes: Topsafe® protective case, batteries and factory calibration certificate

Eurotec Code: 0563.8051

pH Testers

pH Buffer Solution

- Certified buffer solution for electrode calibration of Testo pH meters.

Dosing Bottles (250ml)

pH Buffer 4.01
250ml Dosing bottle

Eurotec Code: 0554.2061

pH Buffer 7.00
250ml Dosing bottle

Eurotec Code: 0554.2063





**Testo 206-pH
Meters**

- One-hand pH/C ° measuring instrument
- pH2 spear probe head for semi-solid substances
- Includes: Storage cap with gel, Topsafe® protective case, and belt/wall holder



**pH1
(Liquids)**

Eurotec Code: 0563.2061



**pH2
(Semi-solids)**

Eurotec Code: 0563.2062



Testo 205

- pH tip embedded in break-age proof plastic
- Combined penetration tip with temperature probe
- Maintenance-free gel electrolyte
- Measurement tip exchangeable by user



Eurotec Code: 0563.2051

Data Loggers



Testo 174T

- Mini Data Logger
- Includes: Wall bracket, batteries and factory Calibration Certificate
- Waterproof (IP65)
- Memory = 16K readings
- Requires cradle - additional cost, please call.


Eurotec Code: 0572.1560



Testo 175-T1

- Data Logger
- Includes: Wall bracket, batteries & factory Calibration Certificate
- Waterproof (IP65)
- 3 years battery (AAA) life
- Memory = 1 million readings

Eurotec Code: 0572.1751



Testo 175-T2

- 2-channel temperature data logger with internal (NTC), and external sensor connection (NTC)
- Capable of storing 1 million temperature readings
- Rugged and waterproof according to IP65

Eurotec Code: 0572.1752



Data Logger Accessories:

Eurotec Code: 0628.0006 NTC probe high accuracy (0.2°C at 0 to +70°C) -35 to +80°C, t99 = 5 seconds

Eurotec Code: 0613.1212 NTC probe wide range, waterproof (IP65) immersion/penetration (0.2°C at 0 to +70°C) -35 to +80°C, t99 = 5 seconds



Cool Validation Data Logger Set

Monitor the temperature of food after cooking, through to the cooling and freezing process. Free up your time to perform other tasks.



The details:


- No need to manually log temperatures.
- Removes human error.
- Robust Temperature Data Logger with fast response stainless steel probe.
- CoolValid Includes Software, General purpose probe, USB Cable, Calibration Certificate, 2 years warranty, Padlock, Wall Holder and Batteries.
- $\pm 0.5^{\circ}\text{C}$ Accuracy.
- Large memory for 1 million measurement values.

Cool Valid Set

Data Logger with general purpose probe with easy set up guide provided



HACCP International Approved

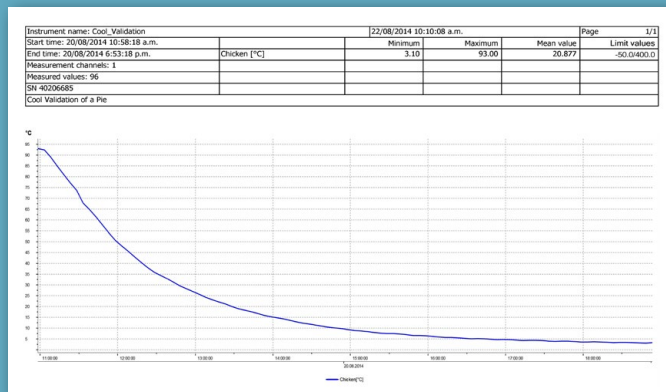


Typical Cool Valid temperature curve

Replacement Probes

General Purpose (G)

Multi-purpose (M)

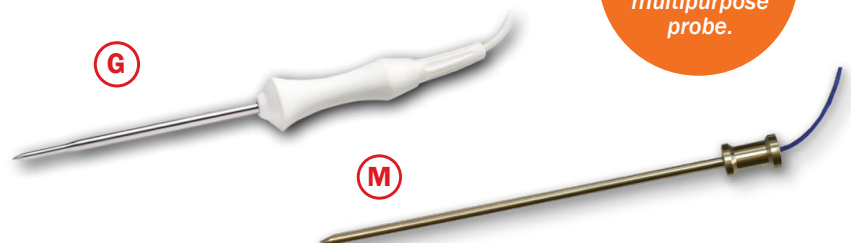

For more measurement options, add a multipurpose probe.

Saveris 2 Wifi Data Loggers



| | | | |
|-----------|------|---------------------------------|--|
| 0572.2031 | 2-T1 | | Display & internal NTC temperature sensor |
| 0572.2032 | 2-T2 | WiFi data logger (wireless LAN) | Display, for measuring temperature, 2 connections for external NTC temperature probes or door contacts |
| 0572.2033 | 2-T3 | | Display for measuring temperature, two external connections for TC temperature probes (Types K, T, J) |
| 0572.2034 | 2-H1 | | Display for measuring temperature & relative humidity, capacitive internal humidity sensor |
| 0572.2035 | 2-H2 | | Display for measuring temperature & relative humidity, connection for one external humidity probe |
| Note: | | | All Data Loggers include: USB Cable, Wall Bracket, Batteries & Calibration Certificate |

Saveris 2 - Cloud Software Licences



Testo Saveris 2 Cloud licence BASIC version

Supplied FREE

Testo Saveris 2 Cloud licence ADVANCED version. Includes 25 SMS per logger/year*

**conditions apply, please call*



Saveris 2 Accessories

| | |
|-----------|--|
| 0572.2020 | Saveris 2 Power Supply with Cable |
| 0572.2155 | External Humidity and Temperature Probe |
| 0572.2152 | Saveris 2 Door Contact Connecting Cable Mini DIN |

The Testo Saveris 2 system enables users to monitor temperature and humidity levels easily, anytime and anywhere, without compromising security, or creating bother with time consuming software.

The system consists of WiFi data loggers and a Cloud data store. The Testo Saveris 2 WiFi data loggers reliably record temperature and humidity at defined intervals, and transmit the measurement values directly by WiFi to the Testo Cloud.



Testo 270 Cooking Oil Tester


Cooking oil has a limited lifetime and is a measurable overhead. Changing the oil too frequently is an unnecessary expense; not changing it quickly enough is bad for the quality of the end product and can lead to complaints from the customer. Now Testo takes the guess work out of changing cooking oil.

Features:

- Clear alarms via backlit display using traffic light principle
- Measuring range +40 to +200 °C
- Easy to clean thanks to smooth surfaces
- Configuration menu and limit values can be locked with a pin number to protect them from external manipulation
- Conforms to: VO (EG) 1935/2004, EC guideline 2004/108/EC
- IP65 (Rinseable under running water)




The testo 270 easily, quickly and reliably determines the quality of cooking oil. It measures the “Total Polar Material” (TPM) content in the oil. The new testo 270 stands out thanks to ergonomic design and intuitive handling. The clear alarm via the coloured backlit display makes it even easier to evaluate the quality of the cooking oil. The use also prevents too early replacement of the cooking oil that reduces the oil consumption by up to 20%.

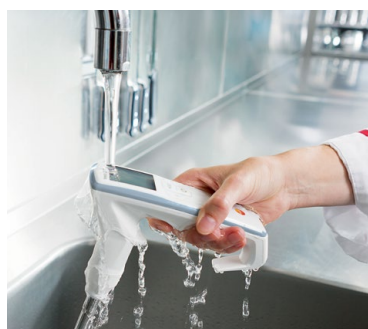

Ice point check for Penetration Probe & IR Instrument


For Probe:

1. Fill a container 3/4 full of crushed ice or ice cubes
2. Add water until it just covers the ice
3. Place thermometer probe into the iced water and gently stir until the temperature stabilizes or the auto hold function is enabled.

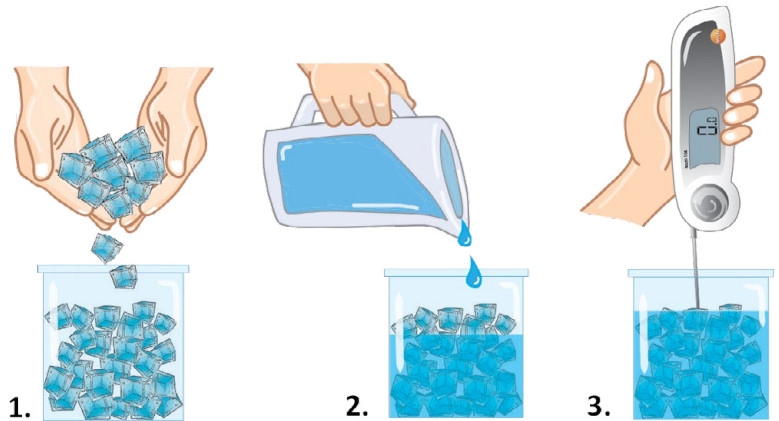

NOTE: Instruments without auto hold function - a stable reading for at least 5 seconds must be made. The Testo 104 thermometer probe stabilized reading should display 0°C (±0.5°C). If outside of this range, please return instrument to Eurotec for evaluation

For IR Instrument:

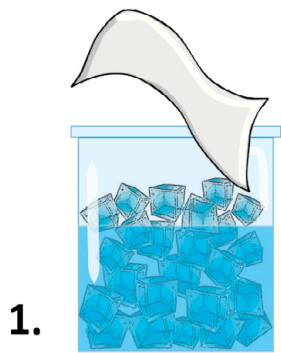

1. Tear a paper towel and place on top of the icy water. Allow the paper towel to absorb the water before taking a reading.

2. To take a reading using the Testo 831 Infrared gun style thermometer, simply press the trigger (press the ON button of the Testo 805).




Note T831: ensure both lasers are pointing at the paper towel. **Note T805:** as close to the target as possible without touching the surface. Repeat the process 3 times to gain confidence in the reading.

A good reading for both the T831 & T805 is 0°C (±2°C) If outside of this range, please return instrument to Eurotec for evaluation.


Infrared useful Tips:

Before performing an ice point check with the infrared thermometers, first check the emissivity setting. This is represented by "ε". To access this setting on model T831 only, press the UP arrow for 3 seconds. A value of 0.95 will appear, if different use the up/down arrows to change the value to 0.95.

Only reads surface temperature. The values displayed on the instrument is an average value of everything inside of the circle.

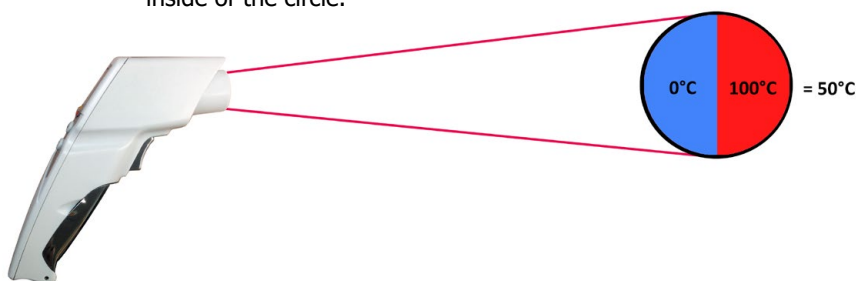


Dual Laser
Diameter of the circle



You know the exact target of interest

Single Laser
Centre of the circle



Although you are aware that your circle is centre of the target, there is now indication of how big the circle is

Keep a record of when your instruments have been calibrated with the handy table below:

| Instrument Serial Number | Date of Calibration |
|--------------------------|---------------------|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

After-Sales Support

Eurotec maintains an in-house service, repair and calibration facility to Testo and other instrument brands.

HACCP Calibration Program

Eurotec offers a computer monitored, annual calibration service for clients registering their instruments serial number in the 'Call back' program. Just like a 'WOF' reminder, clients are advised when their instruments are due for their periodic HACCP calibration and maintenance checks

2 Year Warranty

Testo food instruments are backed up with a 2 year manufacturers warranty. External probes have a 1 year warranty.

Auckland

750C Great South Road
Penrose
Auckland, 1061

Ph: 09 579 1990

Wellington

Unit 9, 2 Tyers Road
Ngauranga Gorge
Wellington

Ph: 04 499 3591

Christchurch

30A Carlyle Street
Sydenham
Christchurch

Ph: 03 366 0017



www.eurotec.co.nz



EUROTEC
People • Technology • Solutions

HVAC • Refrigeration • Electrical • Measurement

Be sure. **testo**

